






LUPROMAX RAZER 4T RACING

NATO Stock No. 6850-32-087-940

Synthetic Engine Oil 20W-50

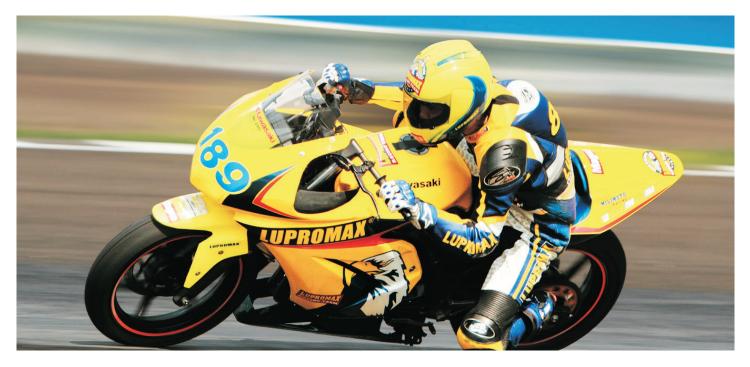

DESCRIPTION

LUPROMAX Oil with Heat Activated Technology™ is specially developed to LUbricate, PROtect and MAXimize your engine performance.

LUPROMAX RAZER 4T RACING 20W-50 is engineered for maximum performance in 4-stroke engines, V-Twin engines and motorcycle transmissions. It is wet clutch compatible, shear stable and helps maintain proper oil pressure in elevated temperatures.

LUPROMAX RAZER 4T RACING 20W-50 with Heat Activated Technology™ contains LUPROMAX's proven synthetic technology with a high performance additive system to provide superb heat resistance and wear protection for ultimate performance and reliability.

LUPROMAX Oil is engineered to provide maximum power for your riding experience.

ADVANTAGES

- Provides outstanding heat resistance and highly effective protection from corrosion
- Reduces heat and promotes cooler operation
- Helps provide optimum acceleration and horsepower for highway cruising, high-speed and other performance application
- Excellent protection at peak engine RPM and power conditions
- Helps to extend the life of engines, transmission, and wet clutch primaries
- Excellent flow characteristics under extreme hot and cold operating conditions and during periods of intermittent use
- Reduces friction and engine noise, enhances shear stability for a quieter, smoother and enjoyable ride



















Synthetic Engine Oil 20W-50

LUPROMAX RAZER 4T RACING

NATO Stock No. 6850-32-087-940

APPLICATIONS

LUPROMAX RAZER 4T RACING 20W-50 is designed to optimize performance and protection for 4-stroke motorcycles where JASO MA are recommended.

- LUPROMAX RAZER 4T RACING 20W-50 is recommended for lubrication of 4-stroke motorcycle engines in highperformance motorcycles.
- LUPROMAX RAZER 4T RACING 20W-50 is recommended for use in early model air cooled V-Twin Harley-Davidson, Knucklehead, Panhead, Shovelhead and other big-bore motorcycles.
- LUPROMAX RAZER 4T RACING 20W-50 is suitable for extreme engine stress conditions, where conventional oil often may not perform

STORAGE

All packages should be stored under cover. Where outside storage is unavoidable drums should be laid horizontally to avoid the possible ingress of water and damage to drum markings. Product should not be stored above 60°C, exposed to hot sun or freezing conditions.

TYPICAL PROPERTIES

Properties			Method	LUPROMAX RAZER 4T RACING
SAE Viscosity Grade			SAE J 300	20W-50
Kinematic Viscosity	@40°C	cSt	ASTM D445	149.3
Kinematic Viscosity	@100°0	C cSt	ASTM D445	18.66
Viscosity Index			ASTM D2270	141
TBN	mgKOH/g	3	ASTM D2896	6.61
Flash Point	°C		ASTM D92	220
Pour Point	°C		ASTM D97	-18
Density	@15°C	kg/l	ASTM D4052	0.868

Copyright 2014 Magna International Pte Ltd. LUPROMAX is a registered trademark of Magna International Pte Ltd in Singapore and/or other countries.

HEALTH, SAFETY & ENVIRONMENT

Health and Safety

LUPROMAX RAZER is unlikely to present any significant health or safety hazard when used properly in the recommended application provided in the Material Safety Data Sheet (MSDS) are followed.

Avoid contact with skin. Use impervious gloves with used oil. After skin contact, wash immediately with soap and water. Guidance on Health and Safety is available on the appropriate Material Safety Data Sheet, which can be obtained upon request through your sales contract office, or via the internet.

Protect the Environment

Take used oil to an authorized collection point. Do not discharge into drains, soil or water.

AVAILABLE PACKAGING

20 liters pail/ 200 liters drum





For more information about Lupromax products, please contact your local distributor or Magna offices:

Distributed	by:



Headquarters & Far East Office: Magna International Pte Ltd

10H Enterprise Road Singapore 629834 **Tel** (65) 6788-1228 **Fax** (65) 6785-1497 Email info@magnachem.com.sg Website http://www.magnachem.com.sg

ISO 9001



ISO 14001



Indonesia Office: PT Magna Indonesia

Central Park Office Tower, 18th floor Suite #2 JI. Letjen S. Parman Kav. 28 Jakarta Barat 11470 Tel (62)021-2903 4333 **Fax** (62) 021-2903 4260 Email contactus@lupromax.co.id

North America Office:

1450 Government Rd West Kirkland Lake Ontario P2N 2E9 Email magna@vappro.com

Australia Office:

6/632-542 Hampton Street, Hampton VIC 3188 Melbourne Australia

Email

nelsoncheng@magnaaustralia.com.au Website http://www.magnaaustralia.com.au

This data sheet and the information it contains is believed to be accurate as the data of printing. However, no warranty or representation, express or implied, is made as to its accuracy or completeness. Data provided is based on standard tests under laboratory conditions and is given as a guide only. Users are advised to ensure that they refer to the latest version on this data sheet. It is the responsibility of the user to evaluate and use products safely, to assess suitability for the intended application and to comply with all applicable laws and regulations. Material Safety Data Sheets are available for all our products and should be consulted for appropriate information regarding storage, safe handling, and disposal of the product. No responsibility is taken for any damage or injury resulting from abnormal use of material, from any failure to adhere to recommendations, or from hazards inherent in the nature of the material. All products, services and information supplied are provided under our standard conditions of sale. You should consult our local representative if you require any further information.

